


BOCCI

38V



38V is a variant of the original 38 series where a large glass sphere is blown with a multitude of haphazard interior cavities, which intersect and collide in unpredictable ways. 38V is smaller, lighter and suspended with coaxial cables. The interior cavities can be filled with plants or left empty.

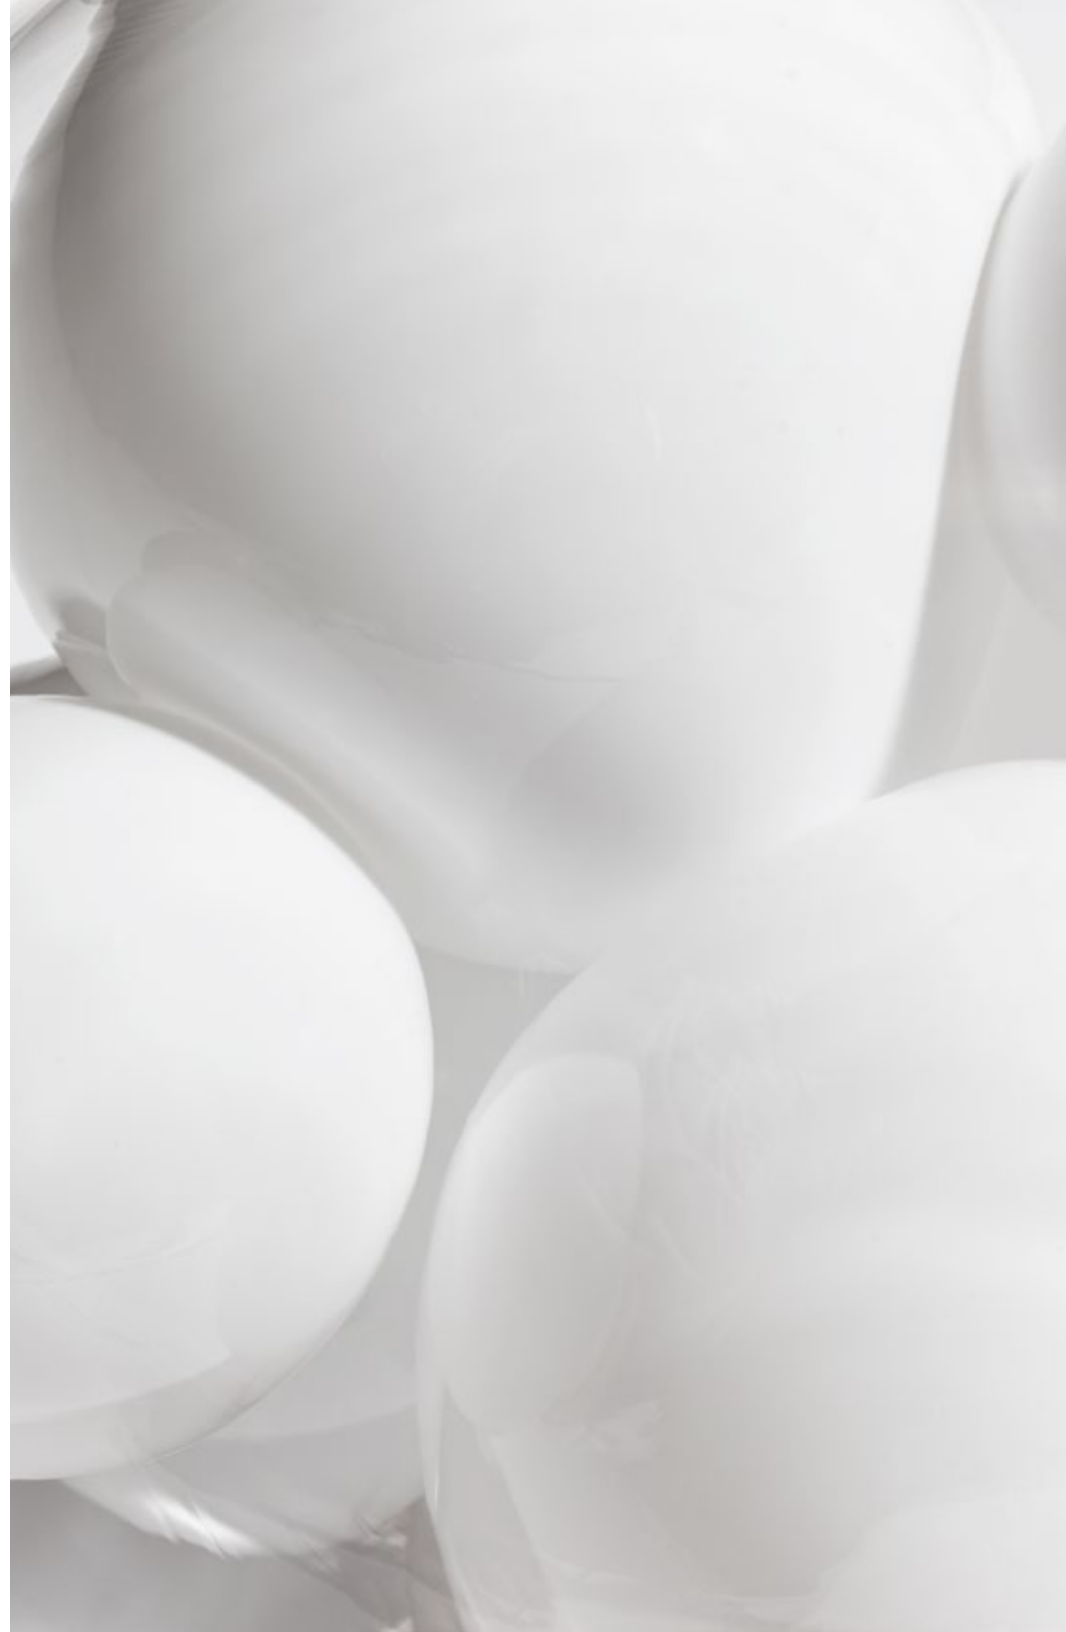

Lamping

1w LED or 10w xenon

Material

Blown glass, electrical components

Patent

EU Patent # 002071019-001




LOW VOLTAGE LUMINAIRE
E476186




±190-210 mm

Wall and Ceiling

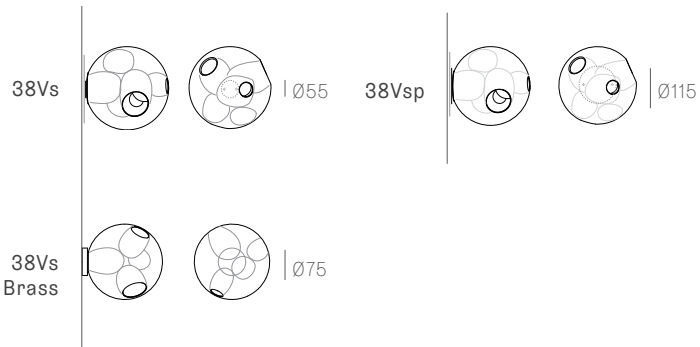


Random Adjustable length

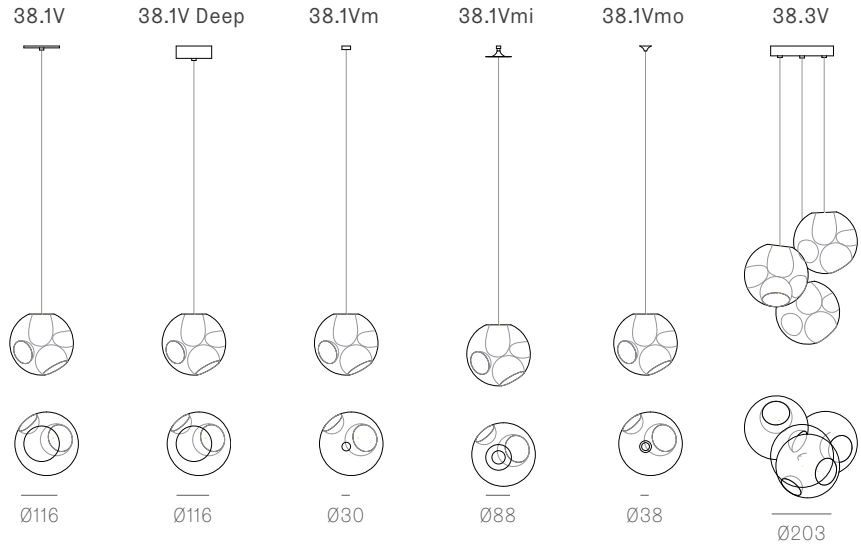

Adjustable up to 3000 mm standard

Adjustable up to 30500 mm custom

Random Non-adjustable length

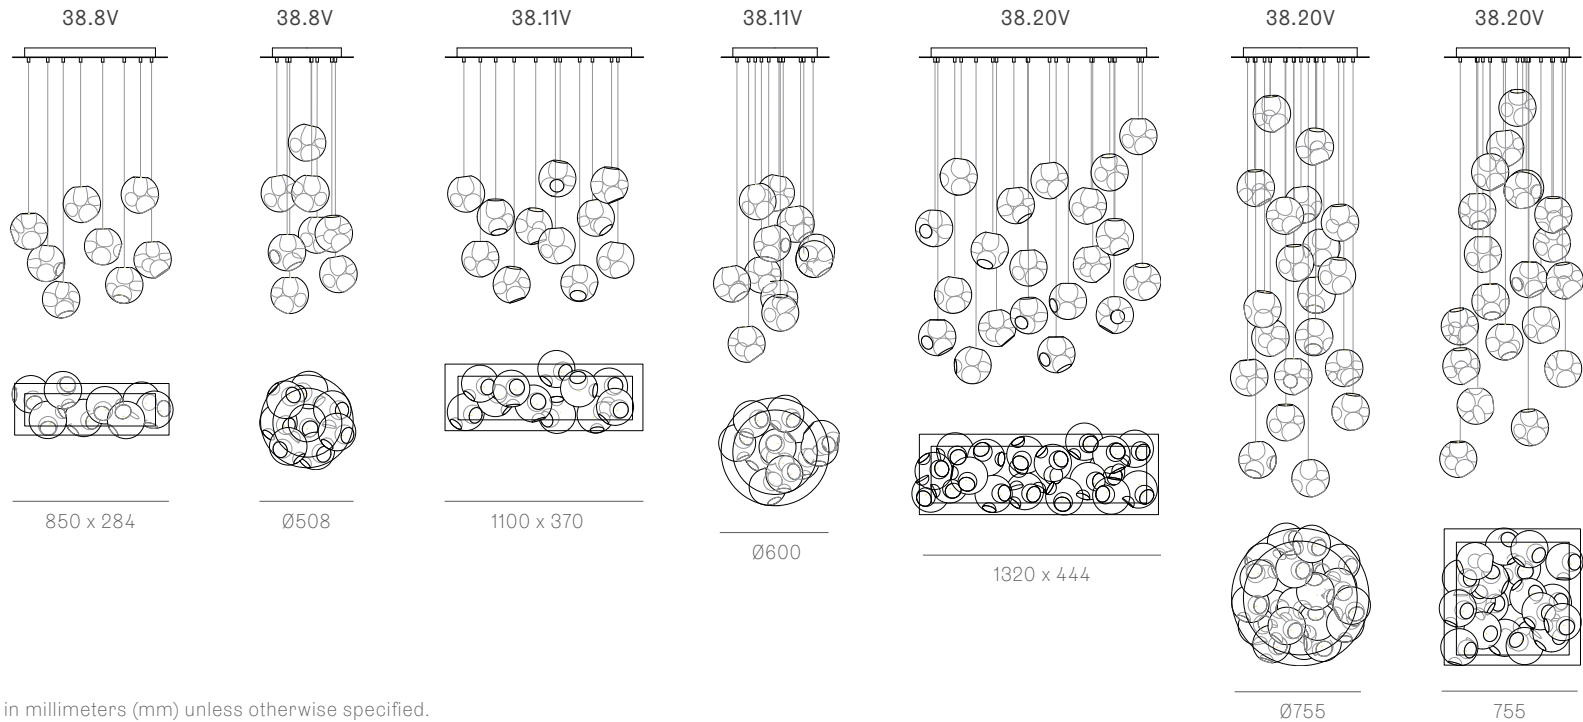


Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 30500 mm custom

Cluster



Adjustable length

38.3V



Ø152

38.7V



Ø203


Adjustable up to 3000 mm standard

Adjustable up to 30500 mm custom

Cluster


Non-adjustable length

38.13V





Ø400

38.19V





Ø501

38.37V

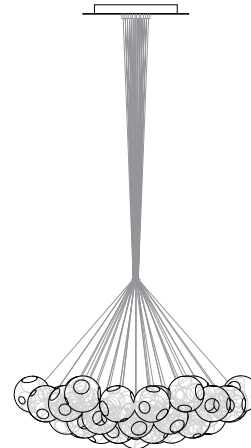

Ø600

38.61V

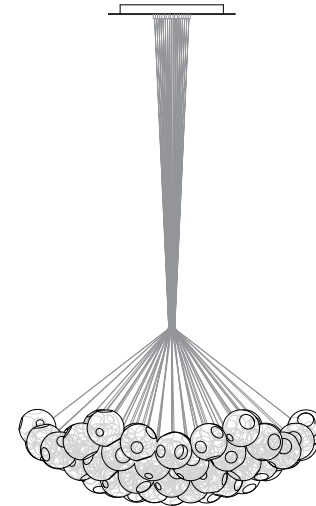


Ø707

Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 30500 mm custom


Table Light

38Vt




Ø75

Non-adjustable length

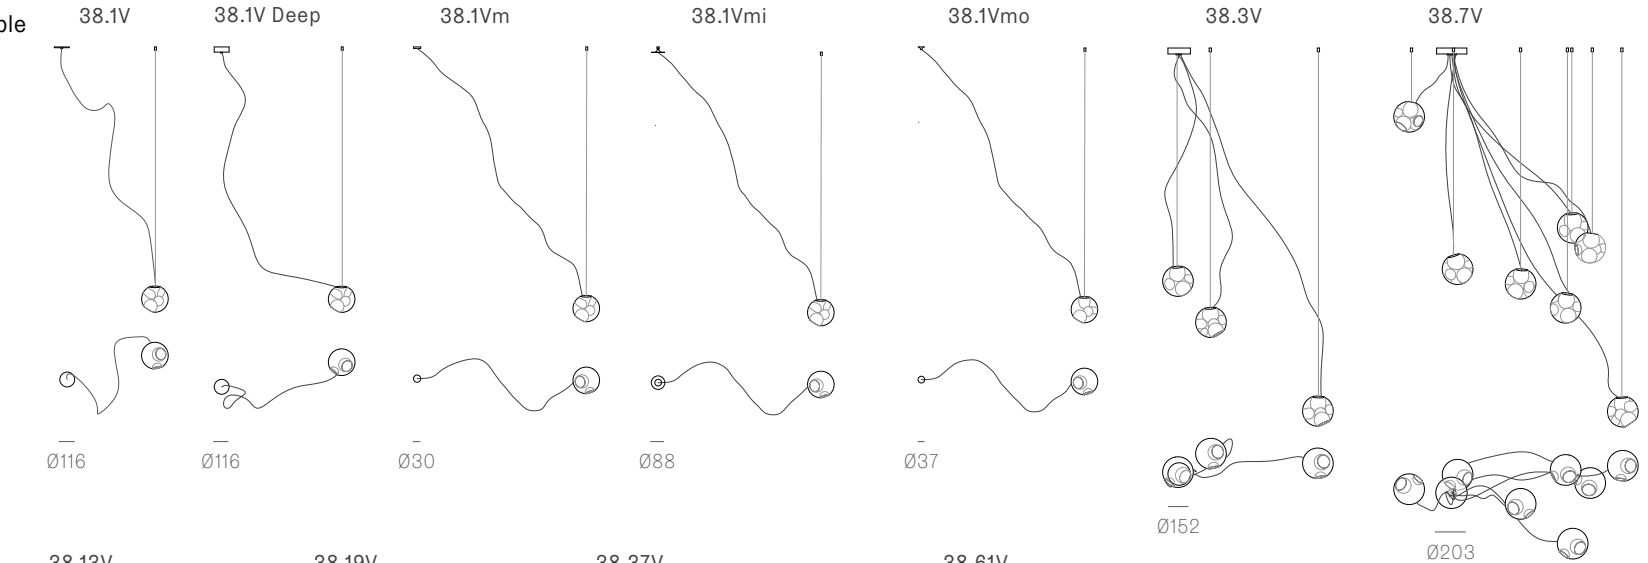

Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 9900 mm custom

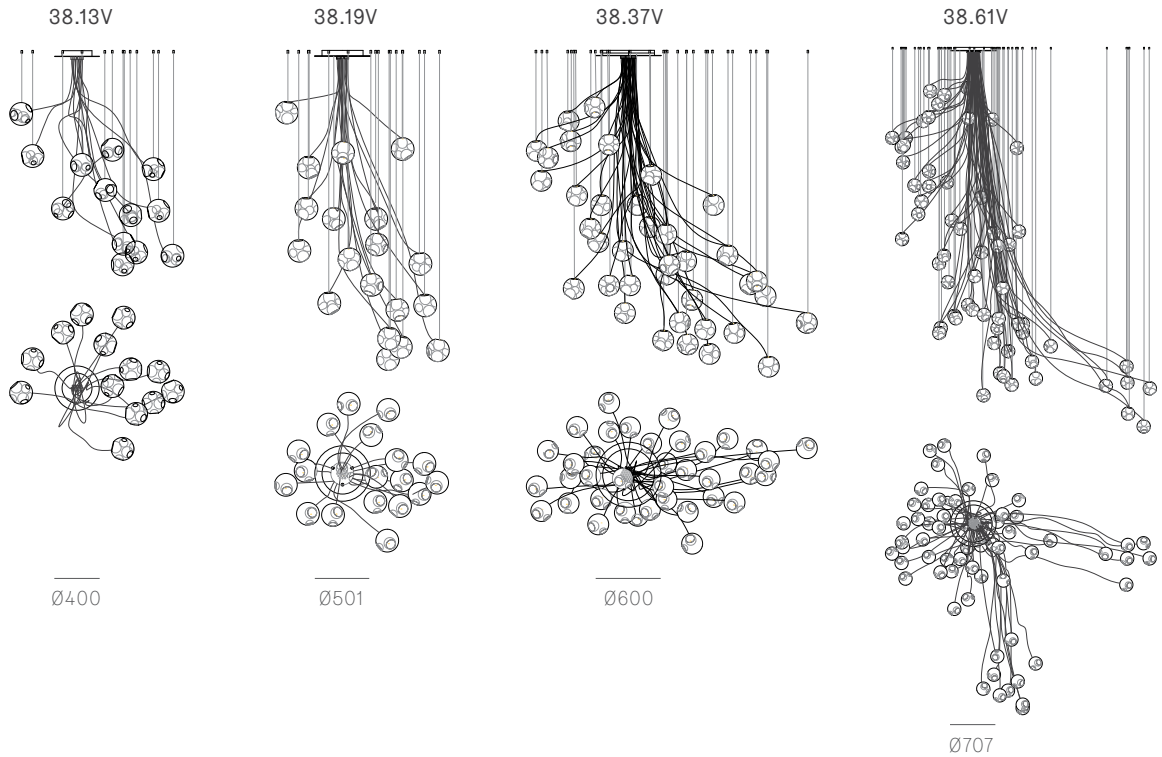

Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 9900 mm custom

Non-adjustable length

38.1Vc



—
Ø116

38.1Vc Deep



—
Ø116

38.1Vmc



—
Ø60

38.3Vc



—
Ø152

38.7Vc



—
Ø203

38.13Vc




—
Ø400

38.19Vc





—
Ø501

38.37Vc



—
Ø600

38.61Vc







—
Ø707

Non-adjustable length up to 3000 mm standard





Non-adjustable length up to 9900 mm custom

Non-adjustable length

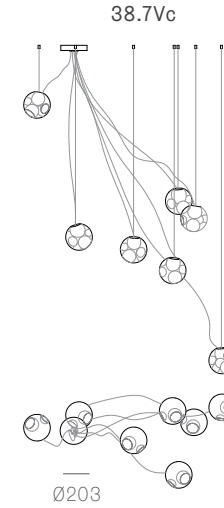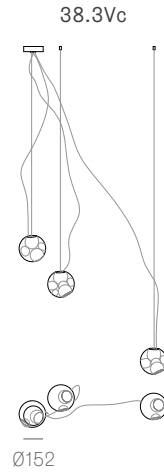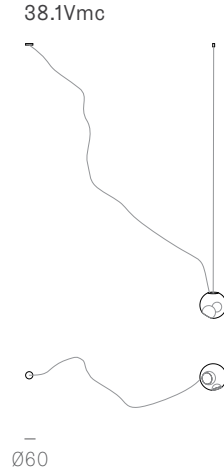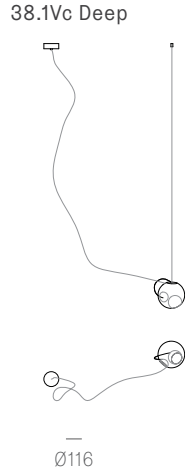

Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 9900 mm custom

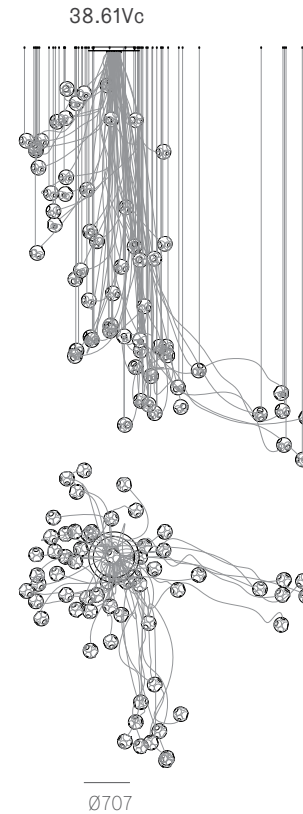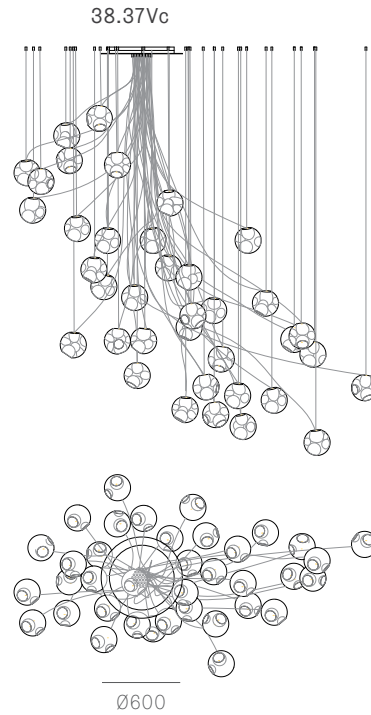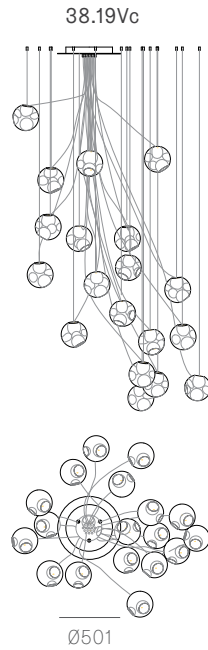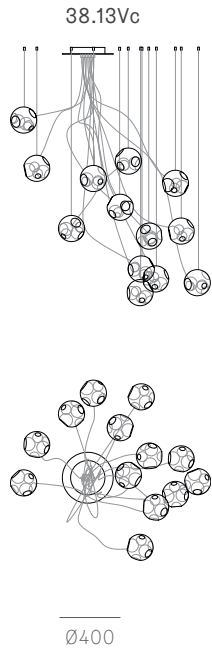

Non-adjustable length up to 3000 mm standard

Non-adjustable length up to 9900 mm custom


38.5Va.1 -
38.9Va.1

canopy




Ø160mm

38.5Va.1

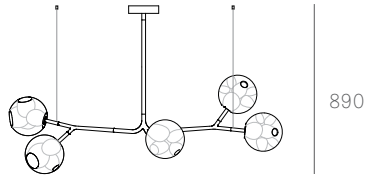


890

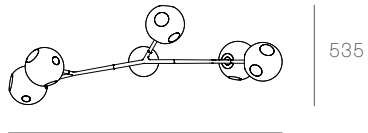


535

1455

38.8Va.1

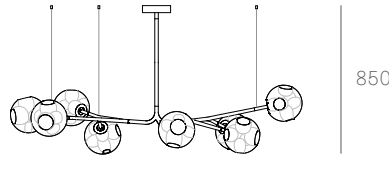


850

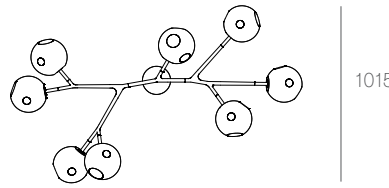


1015

1680

38.8Va.2

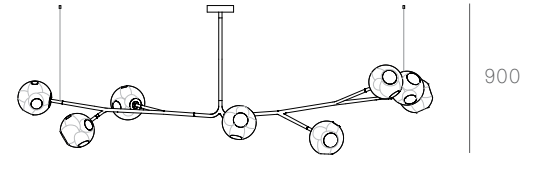


900

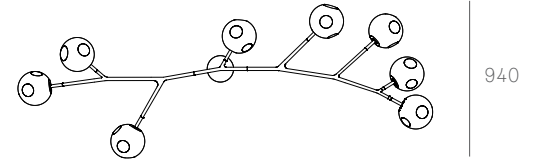


940

2540

38.9Va.1

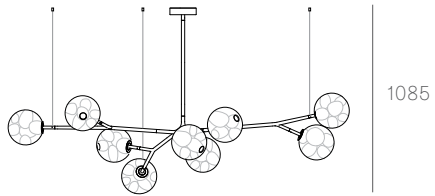


1085

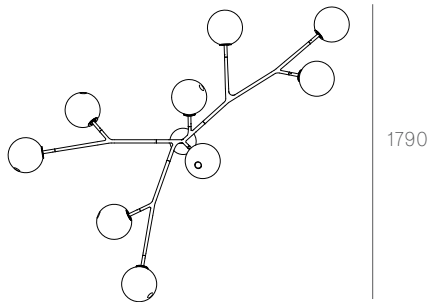


1790

2040

38.9Va.2

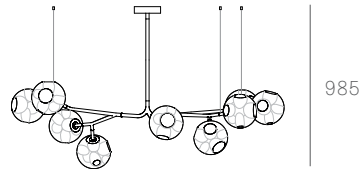

985

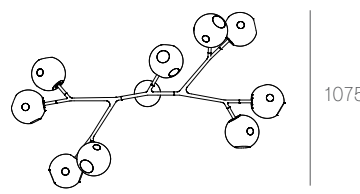

1075

1670

Note: Height dimensions shown with 500mm extender.
For additional extenders, please refer to Pendant Specification document.


All dimensions are in millimeters (mm) unless otherwise specified.

38.11Va.1 -
38.33Va.1

canopy



Ø250mm

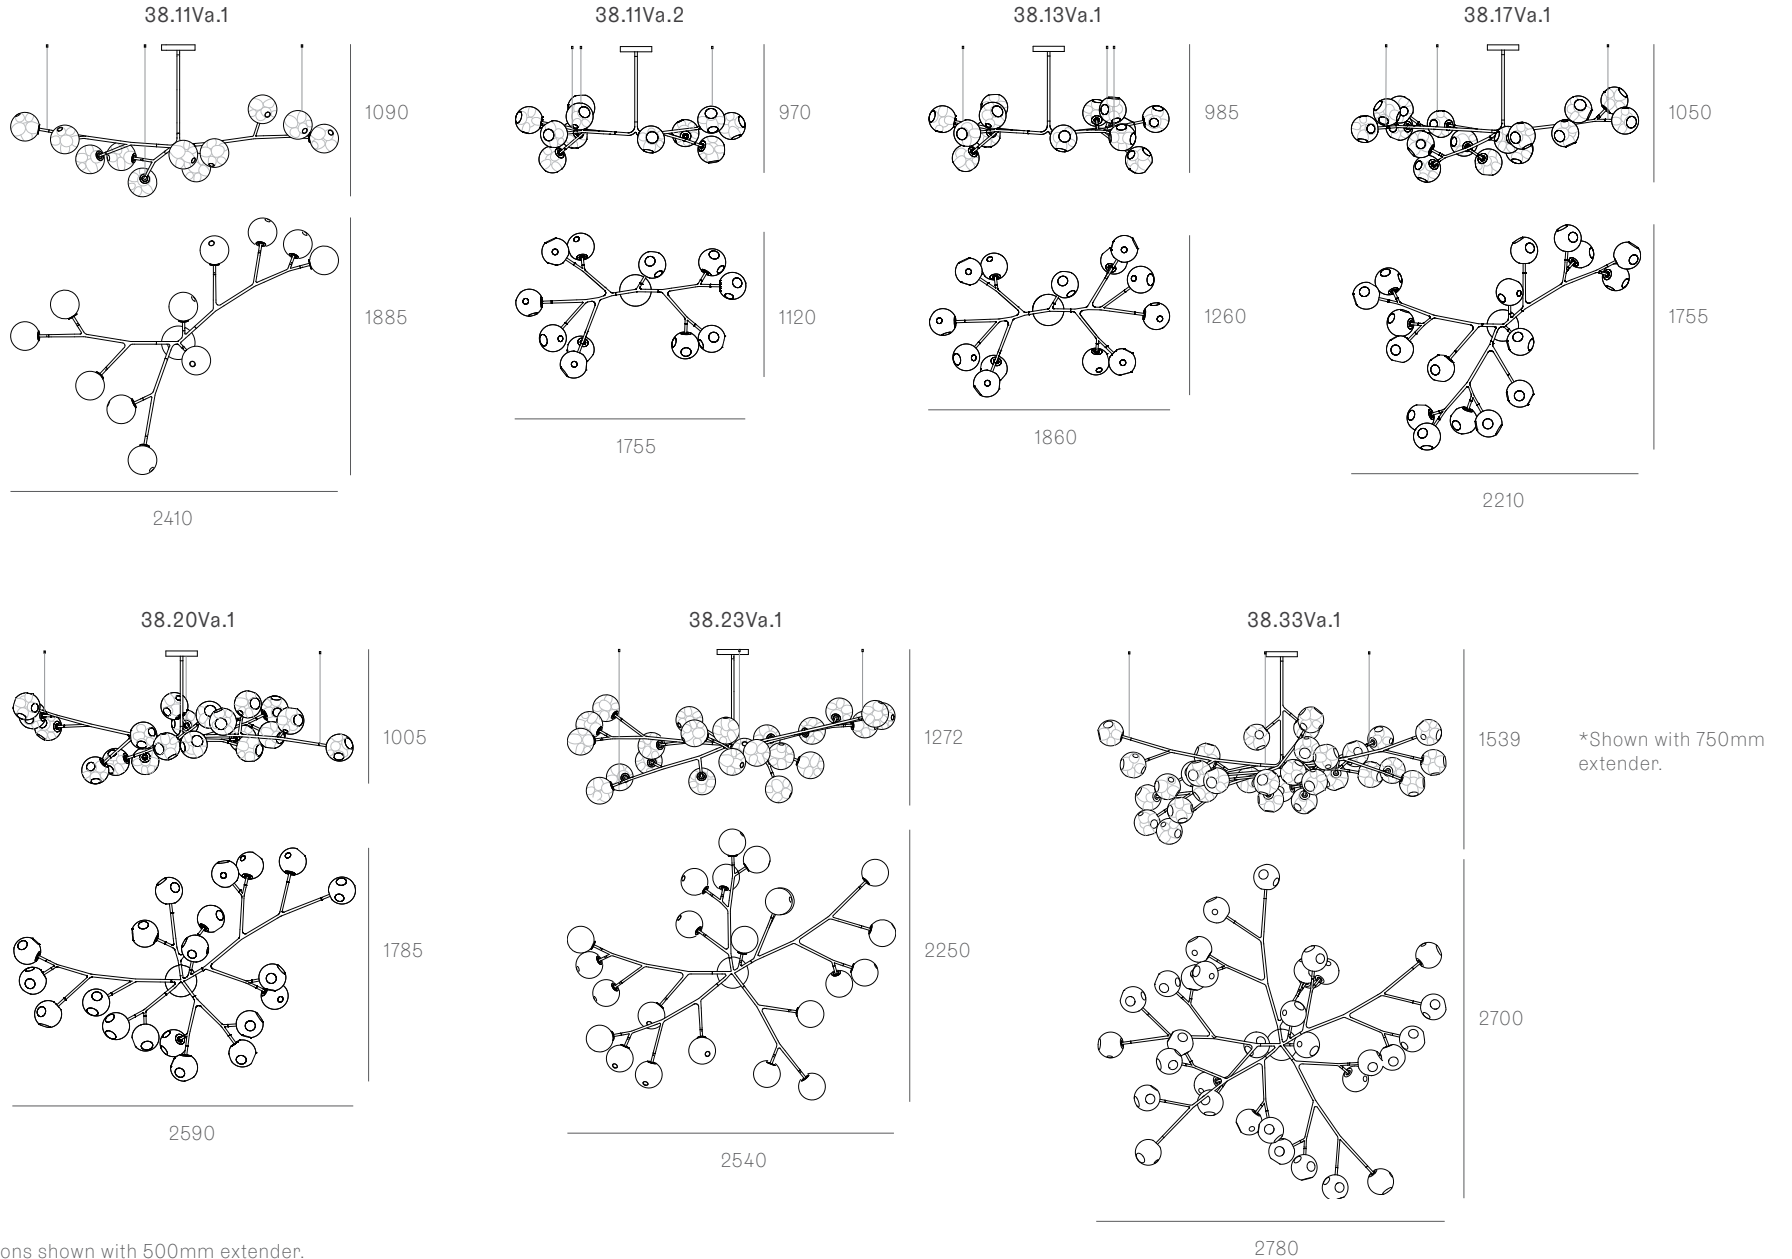

*Shown with 750mm extender.

Note: Height dimensions shown with 500mm extender.
For additional extenders, please refer to Pendant Specification document.


All dimensions are in millimeters (mm) unless otherwise specified.

Suspended

Cable lengths: 3 m / 6 m / 15 m


38.3v suspended short

0.9m

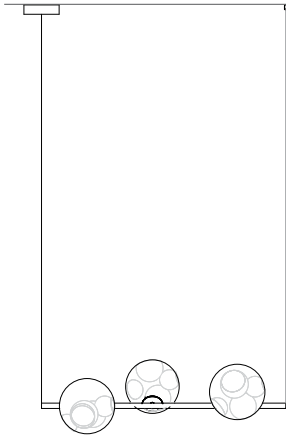


38.3v suspended tall

1.8m

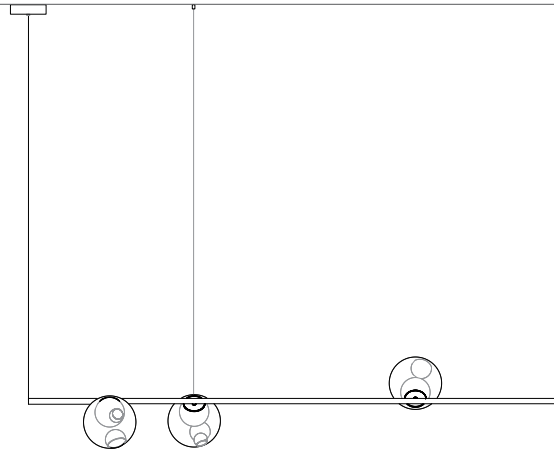

38.6V suspended


1.8m

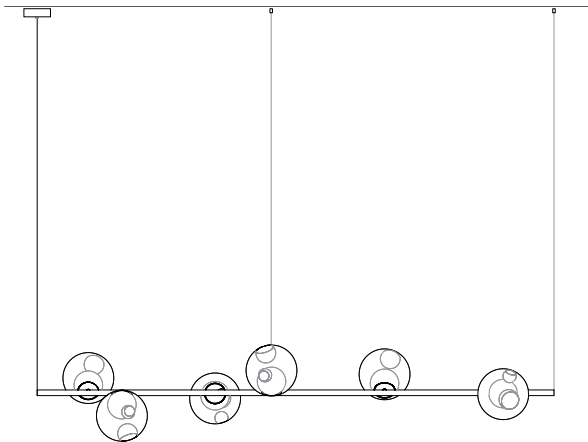

Ceiling mounted


38.3V short

0.9m




38.3V tall

1.8m




38.6V

1.8m




38.9V

2.7m

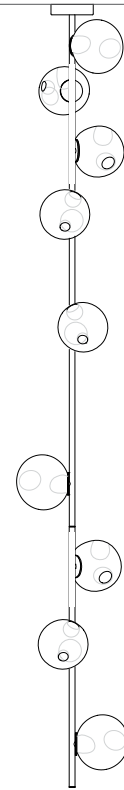


38.12V

3.7m

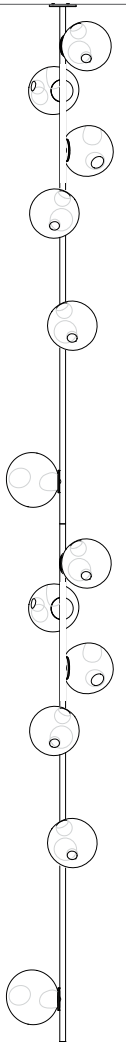

Floor

Column

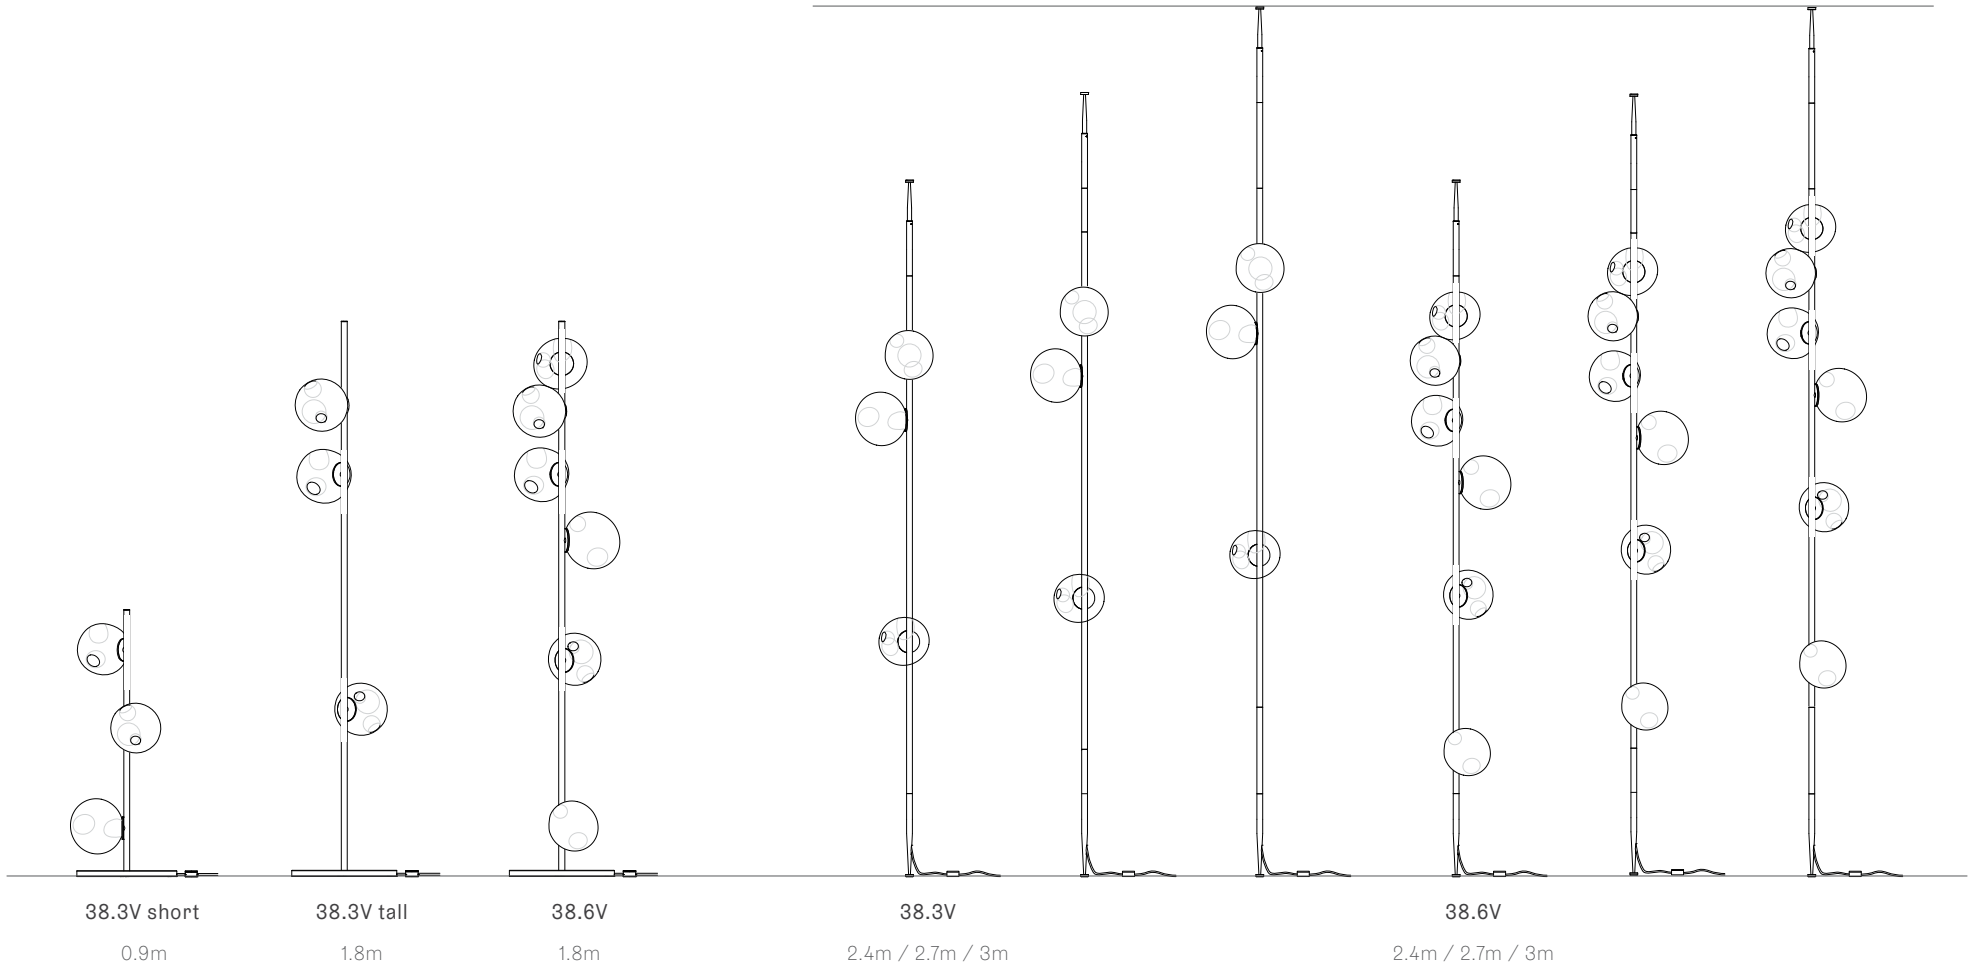

BOCCI

38V — Table Light



BOCCI

38V Series — Random



BOCCI

38V Series — Armature





BOCCI

38V — Stem

