

± Ø157 - 171mm

Image shown above 28.9a.2, 500mm extender

Mounting	Ceiling mounted
Glass Colours	Clear, various colours
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available)
Extenders	Available in 150mm, 250mm, 500mm, 1200mm, 750mm (attached with 2 pendants). Up to 2500mm drop
Finish	Black powder coated
Materials	Blown glass, black powder coated stainless steel armature, electrical components, matte black canopy
Power Supply	Integral Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP20
Note	Optional levelling pendant anchor kit included. Every single Bocci product is handmade. They are blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	CAN 134238 US D687,740 EU 001695834-001 to 004




Weight (kg)	
28.5a.1	9.4
28.8a.1	14.4
28.8a.2	16.1
28.9a.1	16.5
28.9a.2	14.6
28.11a.1	21.7
28.11a.2	20.3
28.13a.1	23.7
28.17a.1	29.5
28.20a.1	35.1
28.23a.1	41.9
28.33a.1	59.1

Certifications




Each product is unique, there may be a variance in the weight up to 10%.

28.5A.1

All dimensions are in millimeters (mm) unless otherwise specified.

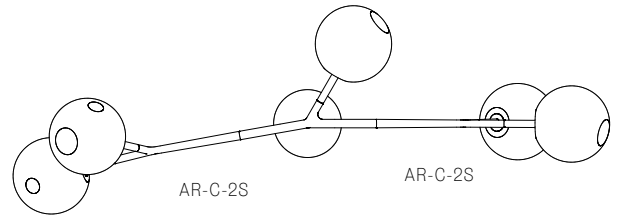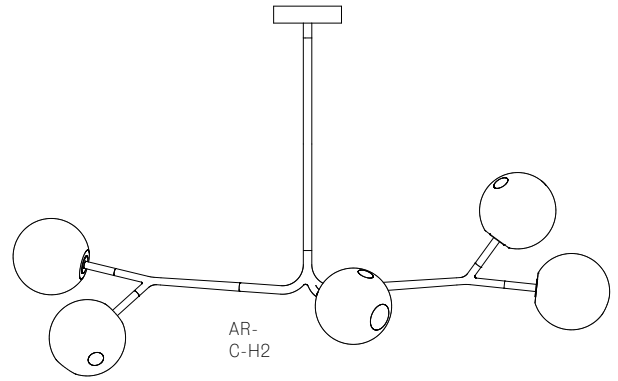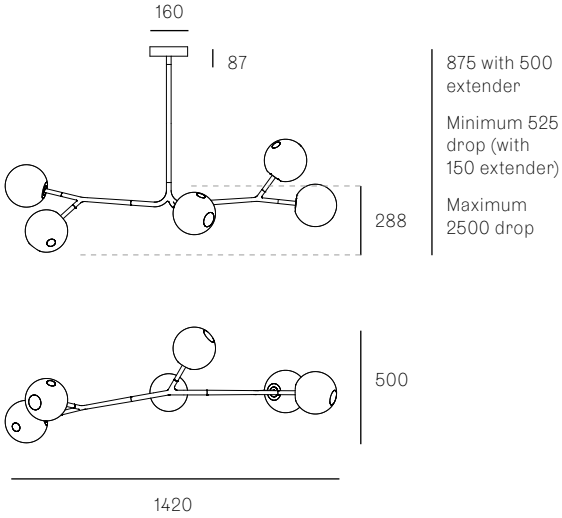


28.8A.1

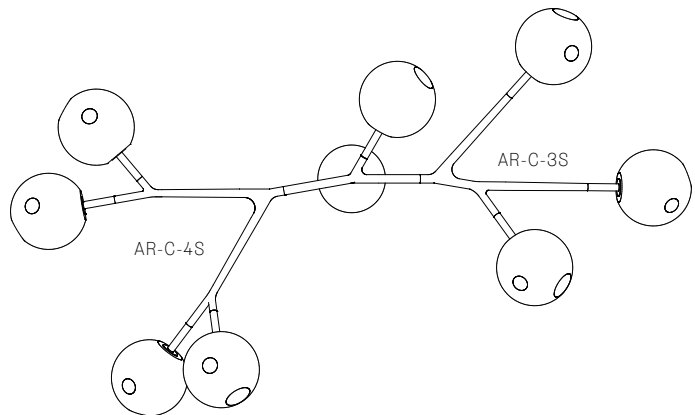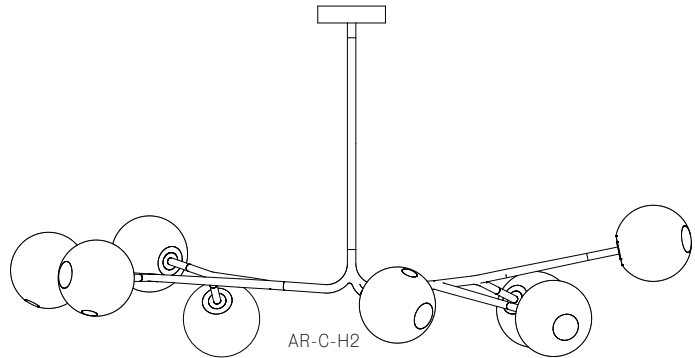
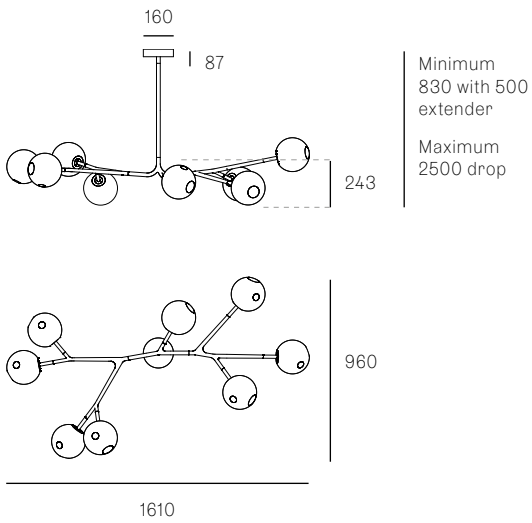


28.8A.2


All dimensions are in millimeters (mm) unless otherwise specified.

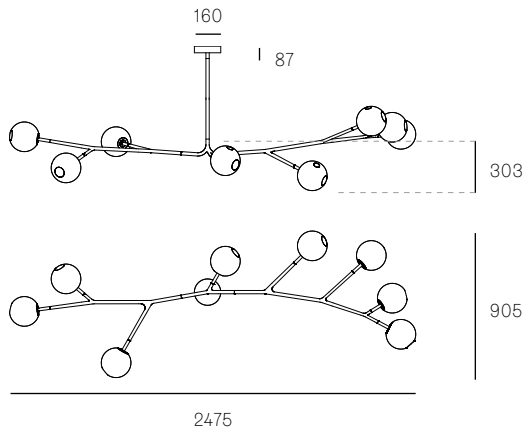


Minimum 890 with 500 extender
Maximum 2500 drop

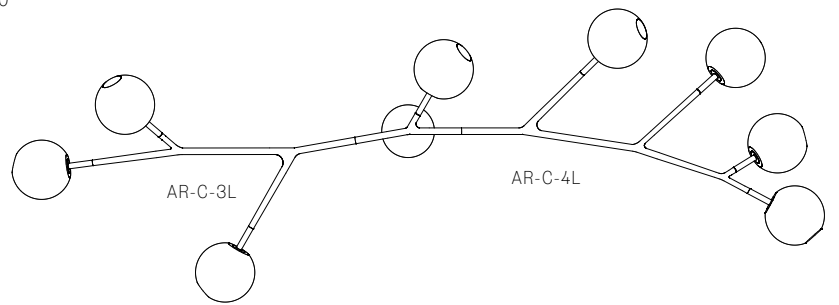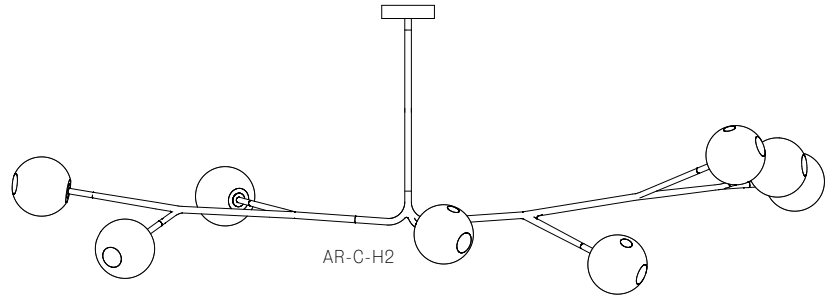

28.9A.1


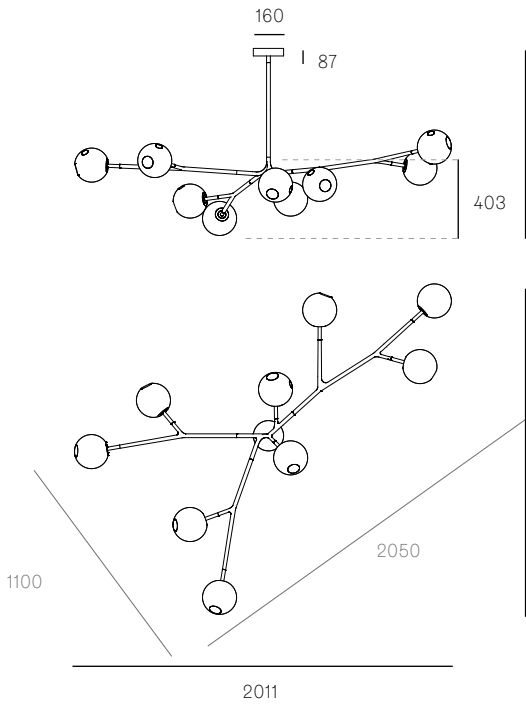


990 with 500 extender
Maximum 2500 drop


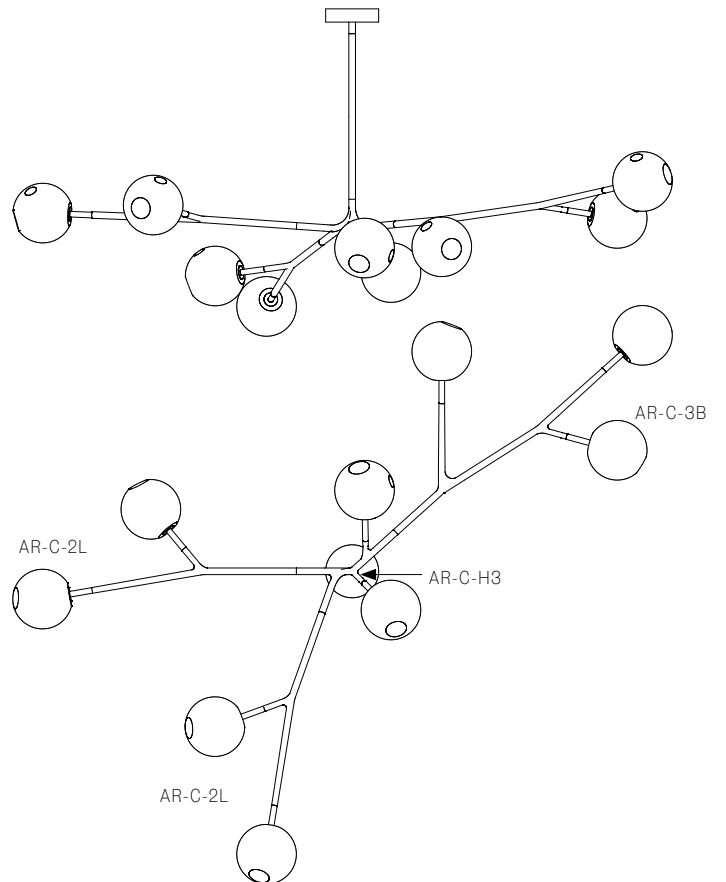


28.9A.2

All dimensions are in millimeters (mm) unless otherwise specified.


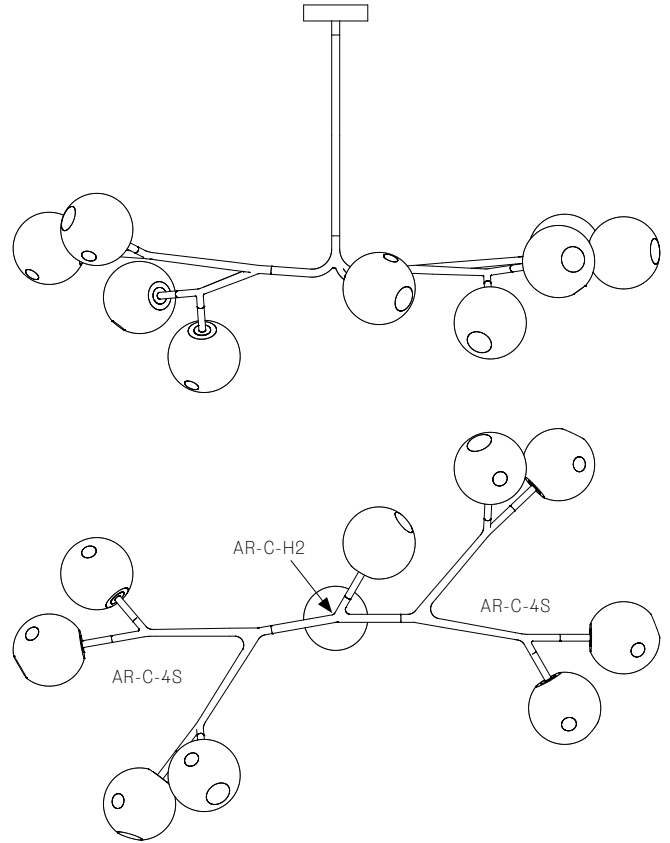
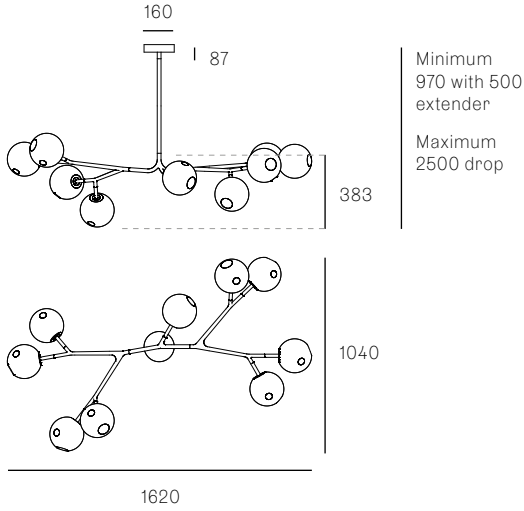


28.11A.1


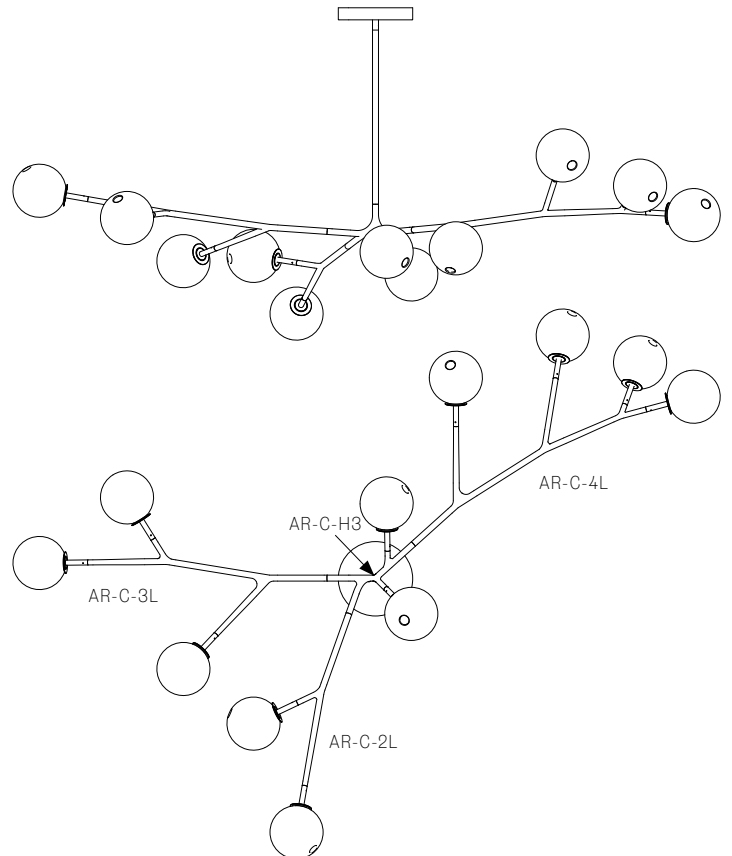
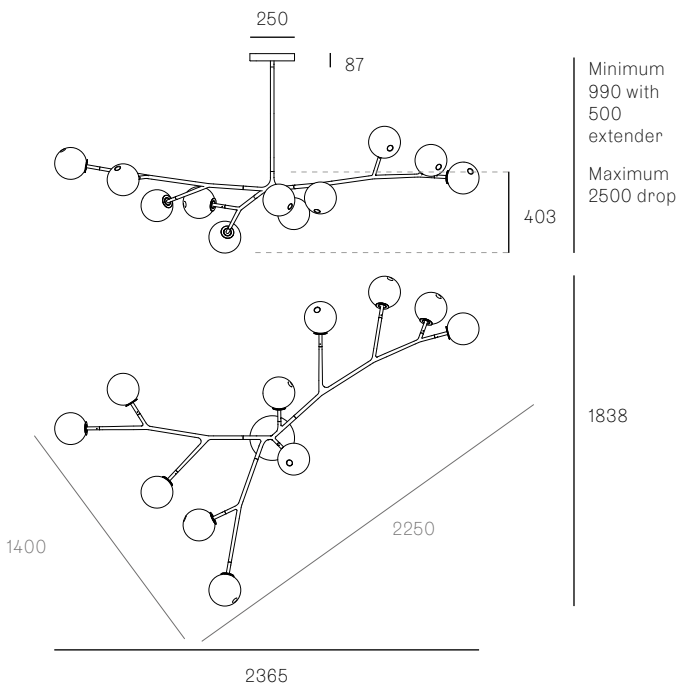


28.11A.2

All dimensions are in millimeters (mm) unless otherwise specified.

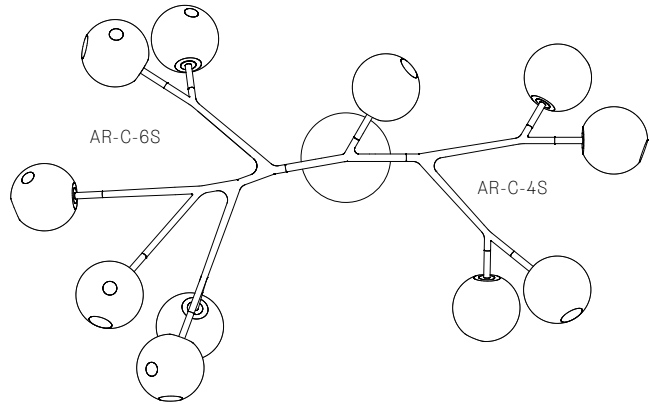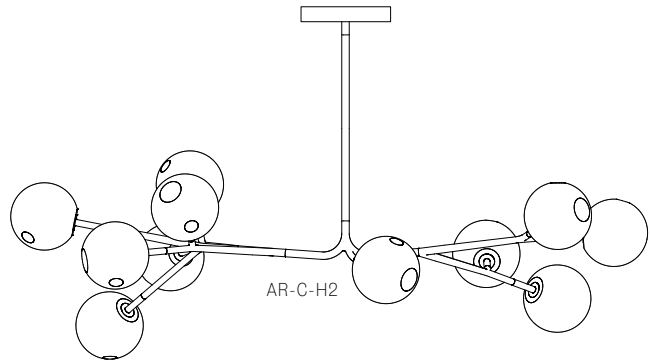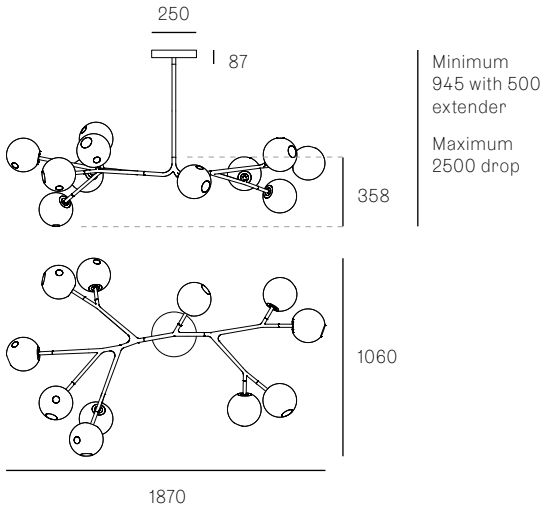


28.13A.1

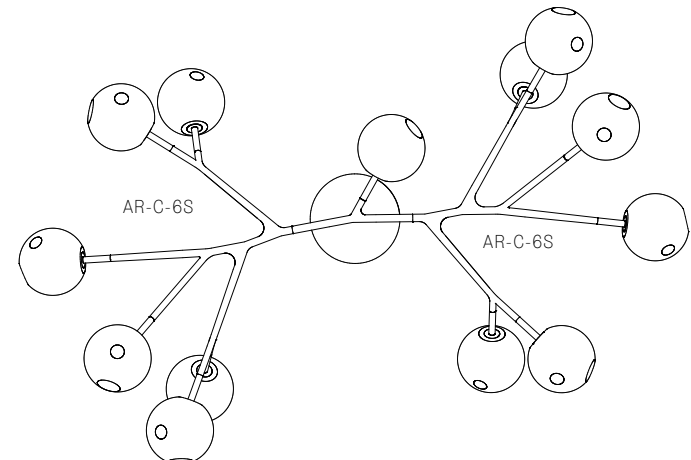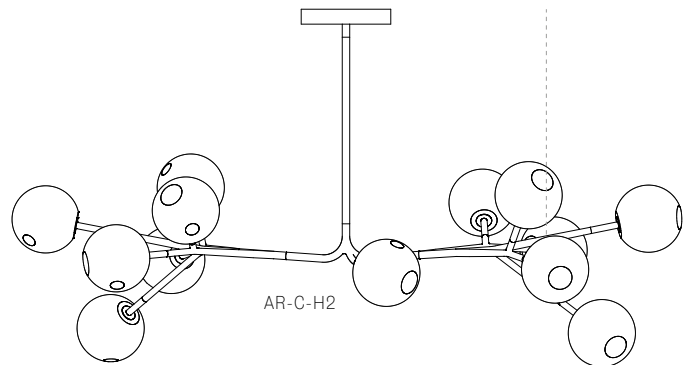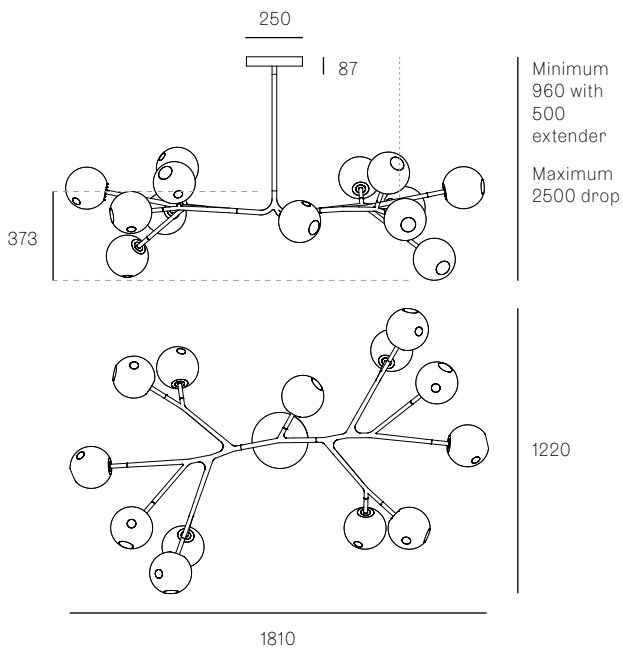


28.17A.1


All dimensions are in millimeters (mm) unless otherwise specified.

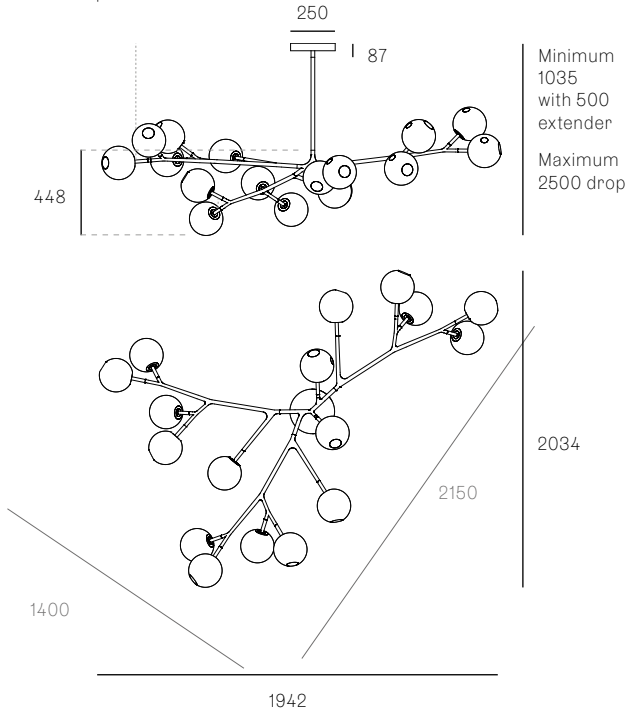


Minimum 1035 with 500 extender
Maximum 2500 drop

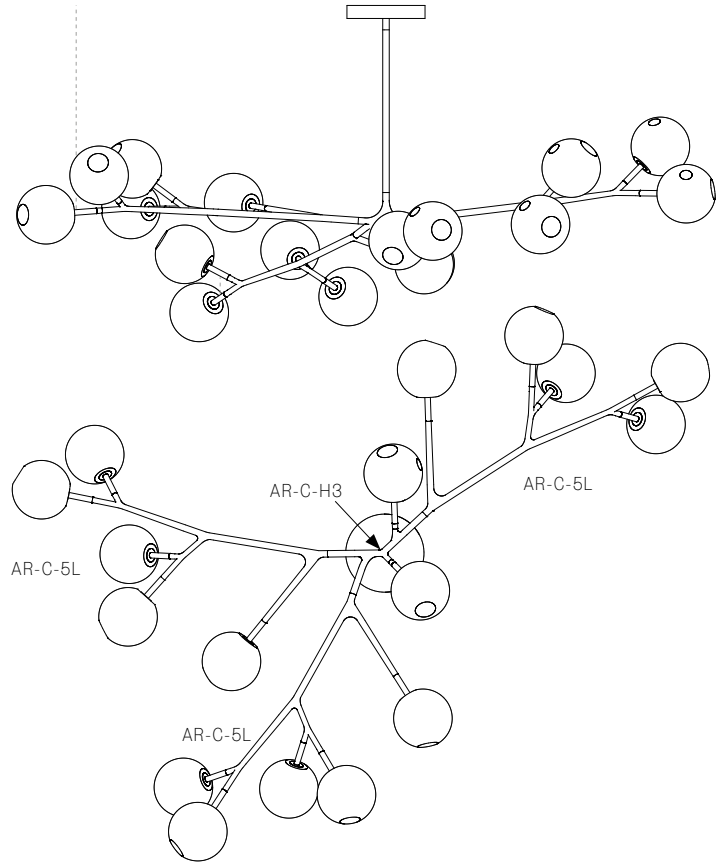

28.20A.1


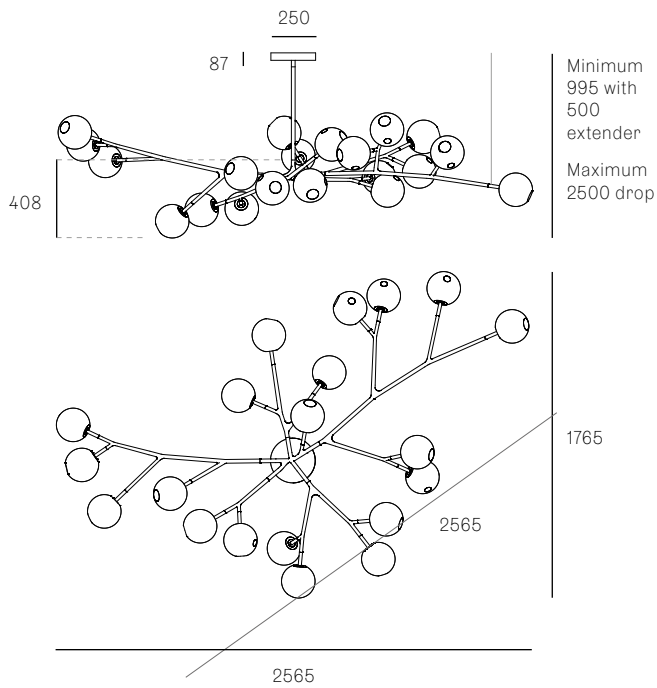


Minimum 995 with 500 extender
Maximum 2500 drop

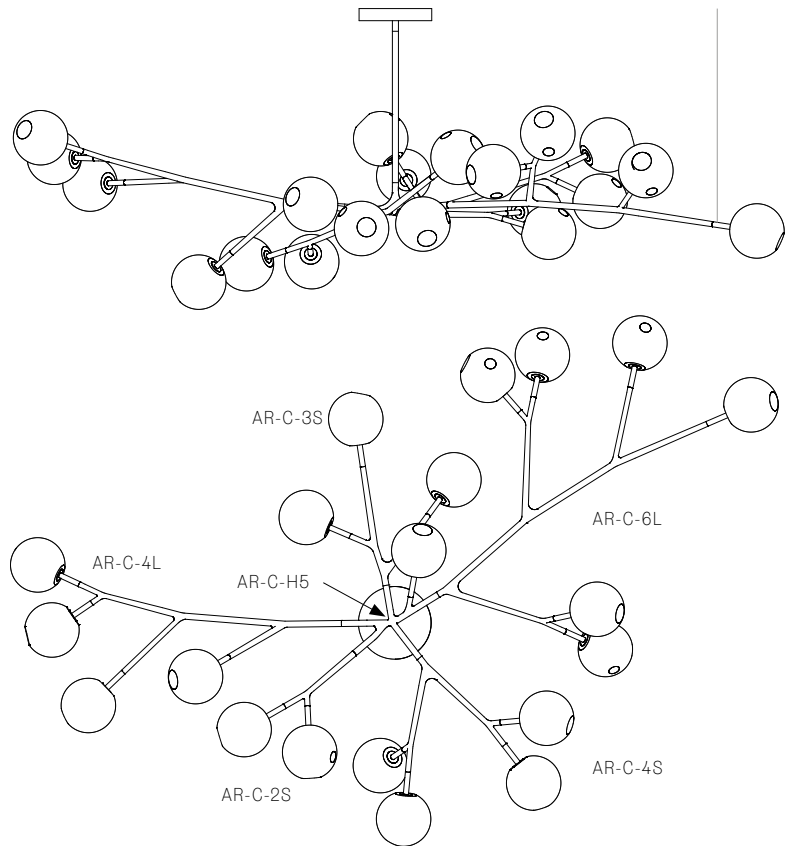

28.23A.1

All dimensions are in millimeters (mm) unless otherwise specified.

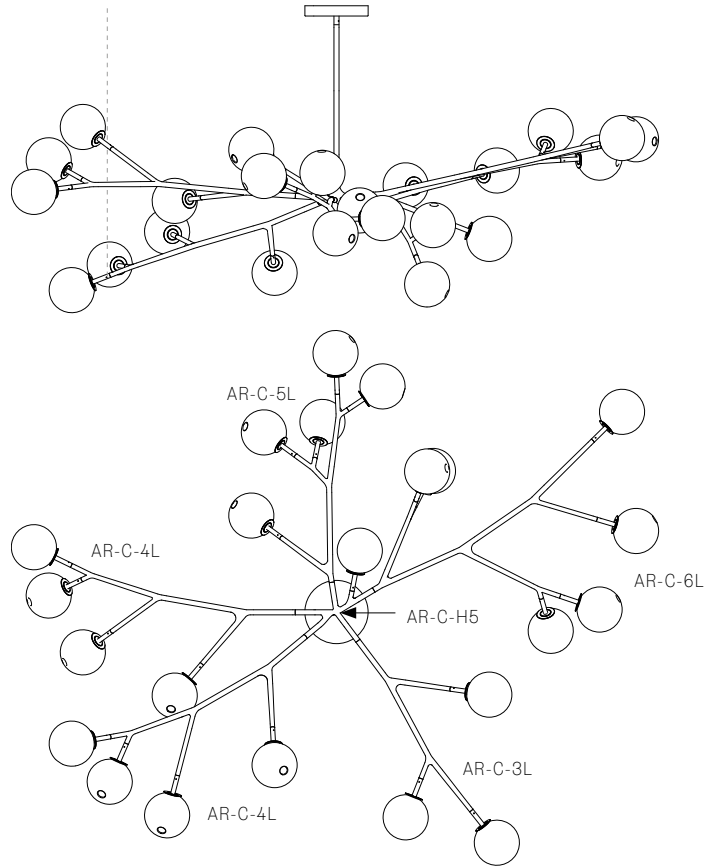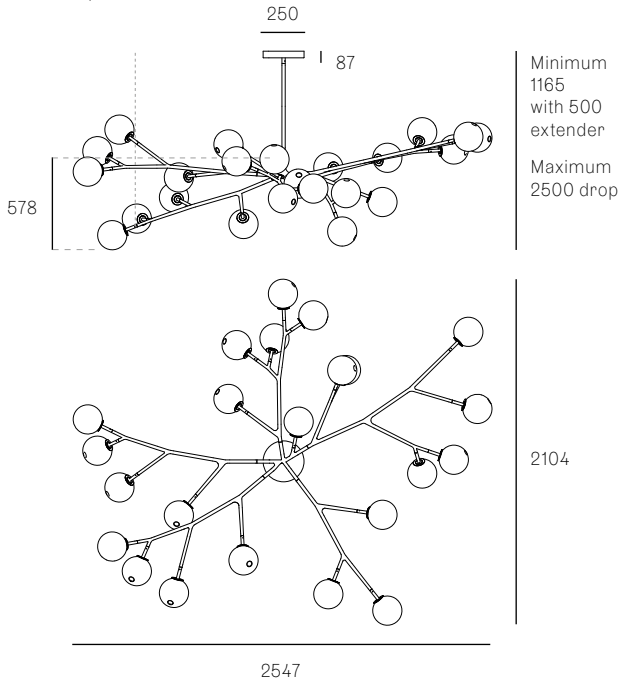

28.33A.1

