



118 Series—Random

Image shown above 118.11 with round canopy

± Ø130 - 146mm

Series	118

Mounting Ceiling mounted

Glass Colours Whit

Lamp 1W LED, 2700K, 100lm (2500K and 3000K options available)

Coaxial Length 3000mm standard / up to 30500mm maximum

Adjustable length: 118.1 - 118.9 Non-adjustable length: 118.11 - 118.28

Canopy Finishes 118.1 - 118.7: white, black or brushed nickel canopy

118.9 - 118.28: white canopy

Materials Blown glass, braided metal coaxial cable, electrical

components, steel canopy

Power Supply Integral

Remote mounted for 118.1m

Bocci recommends remote mounting power supplies for ease

of long-term maintenance.

Environment Indoor, dry location. IP30

Note Every single Bocci product is handmade. Each one is variously

blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are

individual, irregular expressions of our research.

Patent # Worldwide patents pending.

Certifications



Weight (kg)



Round

118.1	3.3
118.3	9.7
118.5	16.1
118.7	22.4
118.11	42.7
118.20	76.5



Square

118.11	42.7
118.16	62.5
118.28	102




Rectangle


118.9	33.7
118.11	42.7
118.16	62.5
118.20	76.5
118.28	102

}0((1

ADJUSTABLE LENGTH

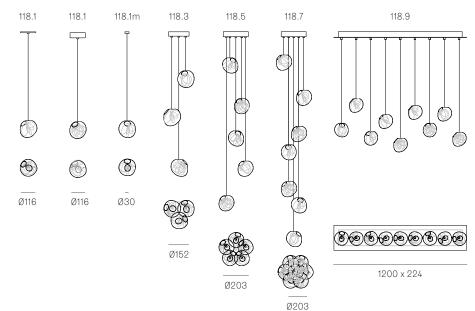

NON-ADJUSTABLE LENGTH




up to 3000 standard up to 30500 custom



850 x 284

NON-ADJUSTABLE LENGTH

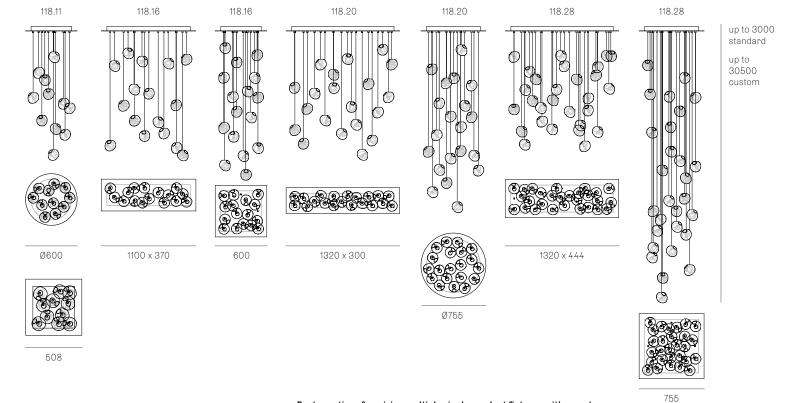

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in $% \left\{ 1,2,\ldots ,n\right\}$

All dimensions are in millimeters (mm) unless otherwise specified.

order to avoid voltage drop, are the responsibility of the installing party.