

Image shown above 57.11 with rectangular canopy

Series	57
Mounting	Ceiling mounted
Glass Colours	Grey, white opaline, light mirror, dark mirror
Lamp	1W LED, 2700K, 100Im (2500K and 3000K options available)
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 57.1 - 57.7 Non-adjustable length: 57.11 - 57.36
Canopy Finishes	57.1 - 57.7: white, black or brushed nickel canopy 57.11 - 57.36: white canopy
Materials	Blown and dipped glass, cast borosilicate glass cap, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 57.1m
	Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D796732 EU 002268581-0001 to 0006
Certifications	

Weight (kg)

0 (0)	
\bigcirc	
Round	
57.1	1.5
57.3	5
57.5	8
57.7	11
57.14	27
57.26	47
57.36	66




Square	
57.11	24
57.26	49
57.36	56


	_

24
29
42
49
65

ADJUSTABLE LENGTH

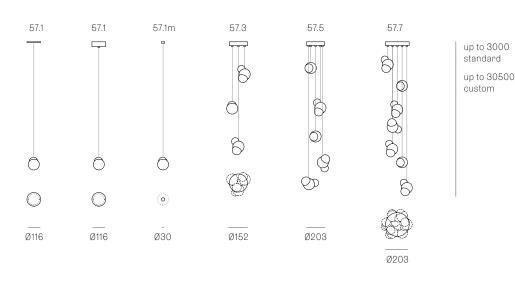

NON-ADJUSTABLE LENGTH

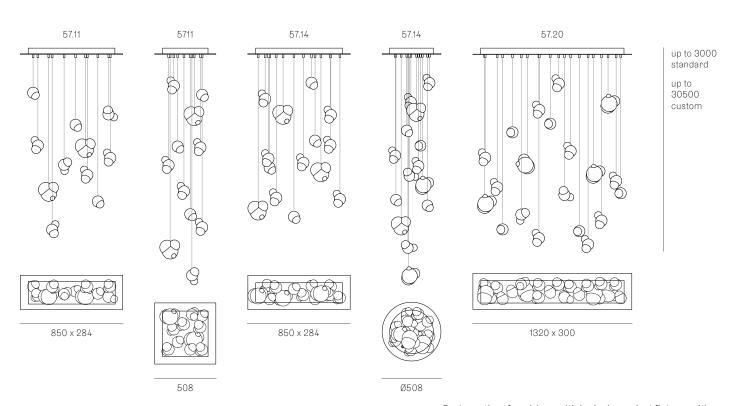


Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.

NON-ADJUSTABLE LENGTH

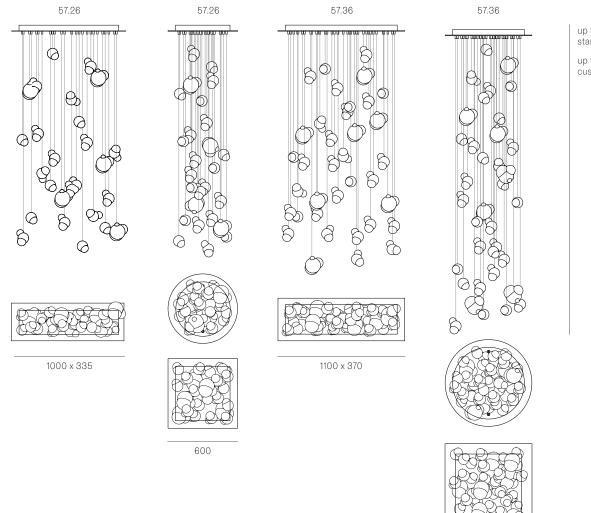

up to 3000 standard up to 30500 custom

755

All dimensions are in millimeters (mm) unless otherwise specified.