




Image shown above 73.20 with round canopy

Series	73
Mounting	Ceiling mounted
Glass Colours	Clear, grey 1, grey 2, grey 3
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 10W Xenon, 2600K, 81lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 73.1 - 73.3 Non-adjustable length: 73.8 - 73.20
Canopy Finishes	73.1 - 73.3: white, black or brushed nickel canopy 73.8 - 73.20: white canopy
Materials	Blown glass, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 73.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D762,323 S EU 002633230-0001 - 0003


Certifications




Weight (kg)

	
Round	Rectangle
<u>73.1</u> 2.7	<u>73.8</u> 32
<u>73.3</u> 8	<u>73.11</u> 40
<u>73.8</u> 33	<u>73.20</u> 68
<u>73.11</u> 43	
<u>73.20</u> 69	
 	
Square	
<u>73.20</u> 75	

ADJUSTABLE LENGTH

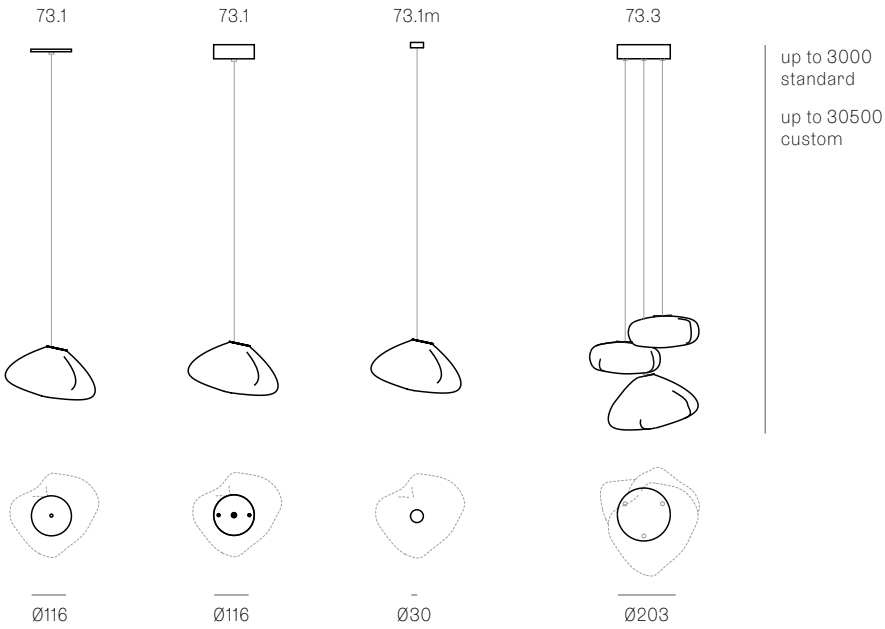

NON-ADJUSTABLE LENGTH

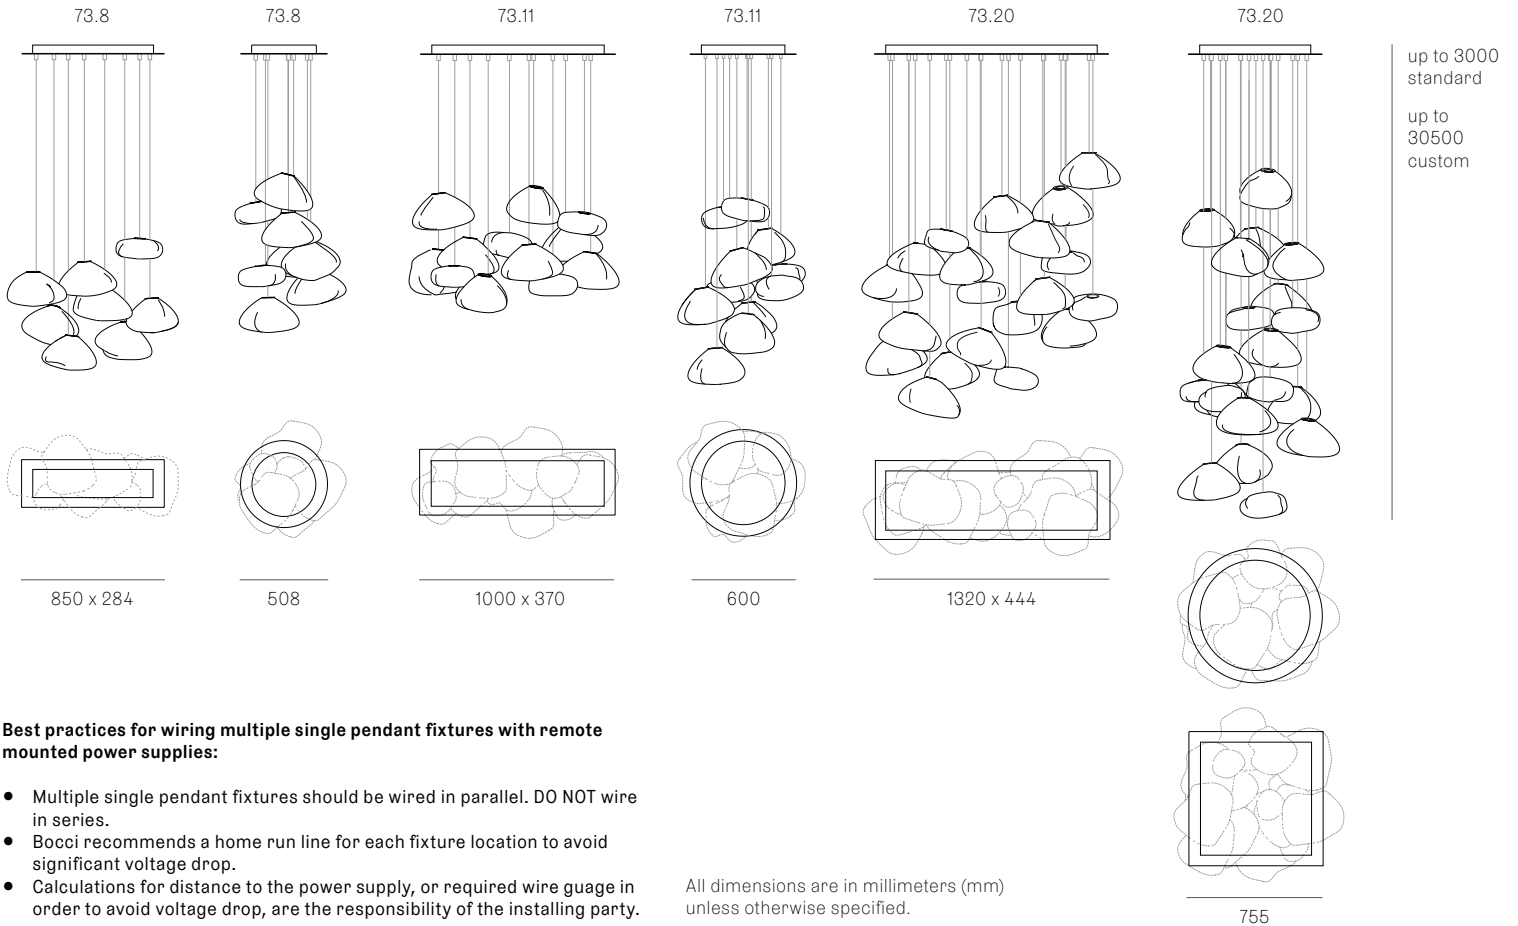

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire gauge in order to avoid voltage drop, are the responsibility of the installing party.

All dimensions are in millimeters (mm) unless otherwise specified.